


SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Chip Ferrite Beads	ABC'S DWG NO.		EDP2009□□□□F□-□□□		
		REV.	20241008	PAGE	1	

I . Configuration and dimensions :

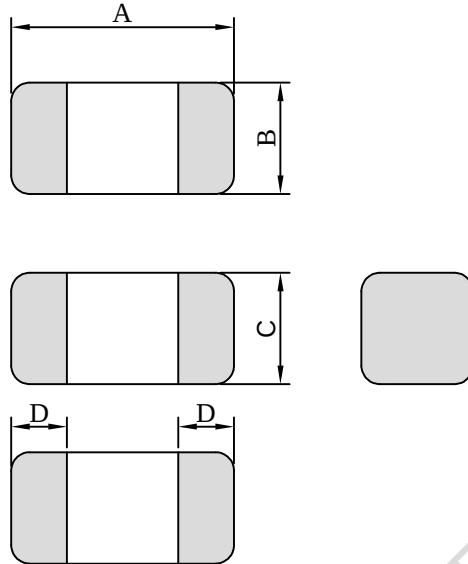


Unit : mm

A	B	C	D
2.00 ±0.20	1.20 ±0.20	0.90 ±0.20	0.50 ±0.30

II . Description :

- a . Body : Ferrite
- b . Inner electrode : Silver
- c . Terminal electrode : Ag / Ni / Sn
- d . Product weight : 27.0 mg (ref.)
- e . Products comply with RoHS' requirements
- f . Halogen free

Peak temp. : 260°C max.
Max. peak temp. - 5°C : 30sec. max.
Max. time above 217°C : 60sec.~150sec. max.

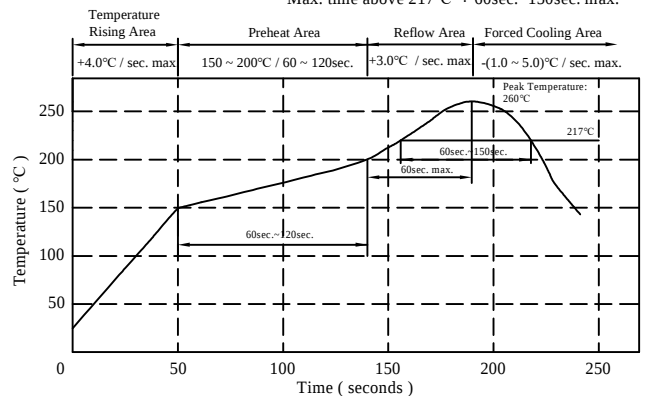

III . General specification :

- a . Operating temp. : -40°C----+125°C
(Temp. rise included)
- b . Resistance to solder heat : 260°C . 10 sec.

AR-001C



千如電子集團
ABC-ATEC ELECTRONICS GROUP

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Chip Ferrite Beads	ABC'S DWG NO.		EDP2009□□□□F□-□□□		
		REV.	20241008	PAGE	2	

IV . Electrical characteristics :

DWG No.	Impedance (Ω)	Tolerance	Test Freq. (MHz)	Test Voltage (mV)	RDC (Ω) max.	IDC (mA) max.
EDP2009000YFB-□□□	0	0~15 Ω	100	50	0.04	2200
EDP2009050YFB-□□□	5	0~15 Ω	100	50	0.04	2200
EDP2009070YFB-□□□	7	0~11 Ω	100	50	0.04	2200
EDP2009090YFB-□□□	9	5~13 Ω	100	50	0.04	2200
EDP2009110YFB-□□□	11	7~15 Ω	100	50	0.04	2200
EDP2009150YFB-□□□	15	9~21 Ω	100	50	0.04	2200
EDP2009190YFB-□□□	19	12~25 Ω	100	50	0.04	2200
EDP2009260YFB-□□□	26	$\pm 25\%$	100	50	0.05	1500
EDP2009310YFB-□□□	31	$\pm 25\%$	100	50	0.05	1500
EDP2009360YFB-□□□	36	$\pm 25\%$	100	50	0.05	1500
EDP2009600YFB-□□□	60	$\pm 25\%$	100	50	0.10	1000
EDP2009700YFB-□□□	70	$\pm 25\%$	100	50	0.10	1000
EDP2009800YFB-□□□	80	$\pm 25\%$	100	50	0.10	1000
EDP2009101YFB-□□□	100	$\pm 25\%$	100	50	0.15	800
EDP2009121YFB-□□□	120	$\pm 25\%$	100	50	0.15	800
EDP2009151YFB-□□□	150	$\pm 25\%$	100	50	0.18	700
EDP2009181YFB-□□□	180	$\pm 25\%$	100	50	0.18	700
EDP2009221YFB-□□□	220	$\pm 25\%$	100	50	0.20	600
EDP2009301YFB-□□□	300	$\pm 25\%$	100	50	0.20	600
EDP2009501YFB-□□□	500	$\pm 25\%$	100	50	0.30	550
EDP2009601YFB-□□□	600	$\pm 25\%$	100	50	0.30	550
EDP2009801YFB-□□□	800	$\pm 25\%$	100	50	0.35	500
EDP2009102YFB-□□□	1000	$\pm 25\%$	100	50	0.35	500
EDP2009122YFB-□□□	1200	$\pm 25\%$	100	50	0.40	500
EDP2009152YFB-□□□	1500	$\pm 25\%$	100	50	0.40	500
EDP2009202YFB-□□□	2000	$\pm 25\%$	100	50	0.45	500
EDP2009222YFB-□□□	2200	$\pm 25\%$	100	50	0.45	500
EDP2009252YFB-□□□	2500	$\pm 25\%$	50	50	0.50	400
EDP2009272YFB-□□□	2700	$\pm 25\%$	50	50	0.60	200
EDP2009302YFB-□□□	3000	$\pm 25\%$	50	50	0.60	200

- 1). Electrical specifications at 25°C
- 2). IDC base on temp. rise 40°C max.

AR-001C



千如電子集團
ABC-ATEC ELECTRONICS GROUP



SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Chip Ferrite Beads	ABC'S DWG NO.		EDP2009□□□□F□-□□□		
		REV.	20241008	PAGE	3	

V . Packaging information :

(1) Configuration

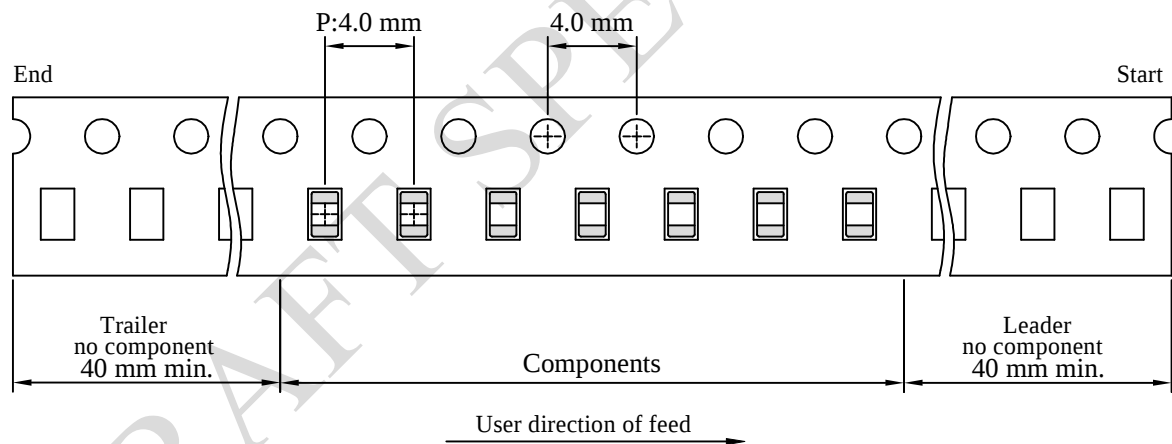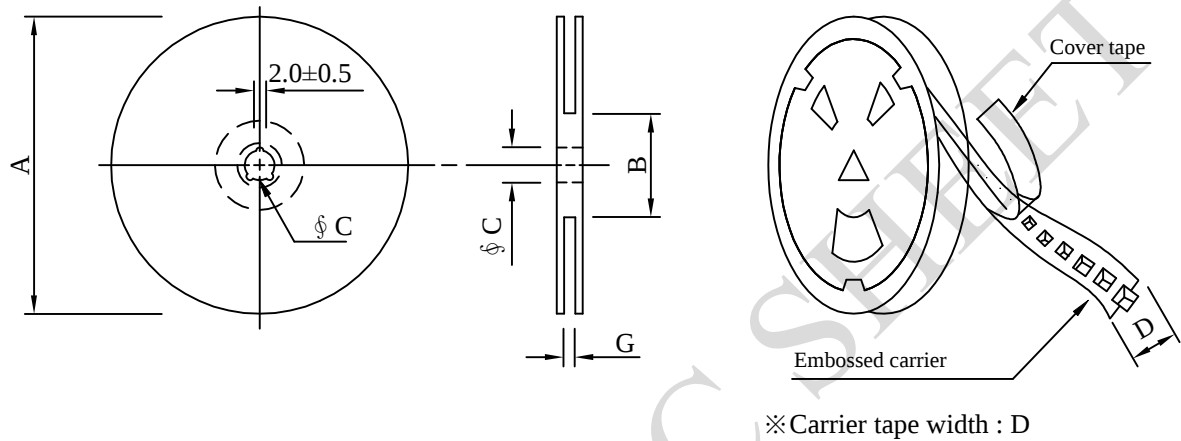

(2) Dimensions

Unit:mm

Style	A	B	C	D	G
07 - 08	178±2.0	57±2.0	12.5±1.5	8	8.0 ^{+1.50} _{-0.00}

(3) Q'TY & G.W. Per package

Code	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (g)	Style	Q'TY (pcs)	G.W. (kg)	Size (cm)
B	4,000	240	07 - 08	200,000	13.2	42 x 41 x 24

AR-001C



千如電子集團
ABC-ATEC ELECTRONICS GROUP

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Chip Ferrite Beads	ABC'S DWG NO.		EDP2009□□□□F□-□□□	
		REV.	20241008	PAGE	4

VI . Drawing number expression :

E	D	P	2	0	0	9					F		—			
---	---	---	---	---	---	---	--	--	--	--	---	--	---	--	--	--

Reference code

Appendix code 2 : Package

Appendix code 1 : Classification

Tolerance code

Electrical code

Dimension code

Type code

Appendix code 1 : Product Classification

Appendix code 2 : Package Information

Code	Inner package	Cover tape	Carrier tape	Bag	Package Q'TY	Remark
B	T /R (Reel package)	NA	NA	NA	4,000 pcs	

AR-001C



千如電子集團
ABC-ATEC ELECTRONICS GROUP

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Chip Ferrite Beads	ABC'S DWG NO.		EDP2009□□□□F□-□□□	
		REV.	20241008	PAGE	5

VII . Safety notes :

1. The risks of using the product are highly relevant to the field of application and need to be evaluated by both user and manufacturer. If the product is used for a purpose that directly affects personal safety or will cause significant impact or loss to the society , please be sure to contact us first for confirmation.
產品使用的風險與應用領域有高度相關，若您應用於直接影響人身安全系統或對社會會造成重大影響與損失之相關用途，請務必優先與我們聯繫確認。
2. The storage period is less than 12 months. Ensure to follow the storage conditions (Temperature: 5 to 30°C, Humidity: 10 to 60% RH or less). If the storage time is exceeded the limit, the electrodes might be deteriorate of terminal soldering.
儲存期不超過12個月，務必遵守儲存條件（溫度：5至30°C，濕度：10至60%RH以下）。如果超過了儲存時間，端子電極可能會氧化而影響焊接。
3. Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
不要在有氣體腐蝕等條件的地方使用或存放（鹽，酸，鹼等）。
4. Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
安裝時的焊接條件應在規格範圍內。如果超過要求，可能會發生短路，性能下降或壽命縮短。
5. When using, it should try to avoid excessive mechanical impact on the product, such as collision / drop ... and other reasons.
使用時，應盡量避免產品受到過度機械衝擊，如碰撞/掉落...等原因。
6. When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
將已安裝新片的電路板組裝到裝置時，請注意應盡量避免電路板受到組裝變形...等，導致產品受到應力。
7. Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
產品會因通電而自我發熱(溫度上升)，因此在熱影響設計方面，需保留適當公差。
8. Do not expose the products to magnets or magnetic fields.
請勿將產品暴露於磁鐵或是磁場中。
9. If you would like to use this products to performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property, or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.
如果您希望將此產品用於性能和/或質量要求更嚴格的安全性或可靠性，或其失敗、故障或麻煩可能對社會、個人或財產造成嚴重損害，或者您有特殊情況要求超出目錄中規定的範圍或條件，請與我們聯繫。