


SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		EHI2512□□□□S□-□□□		
		REV.	20220906-F	PAGE	1	

I . Configuration and dimensions :

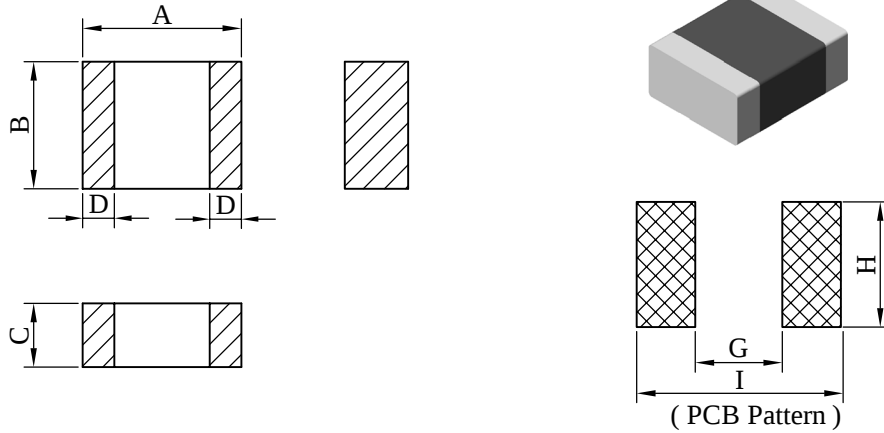

Unit : mm


A	B	C	D	G	H	I
2.50 ±0.20	2.00 ±0.20	1.20 max.	0.60 ±0.2	1.20 ref.	2.00 ref.	2.80 ref.

II . Materials :

- a . Metallic magnetic material
- b . Magnetically shielded
- c . Product weight : 23.1 mg (ref.)
- d . Products comply with RoHS' requirements
- e . Halogen free

III . General specification :

- a . Operating temp. : -40°C ---- +125°C
- b . Resistance to soldering heat :
Solder temp. : 260°C
Dip time :10 sec. max.

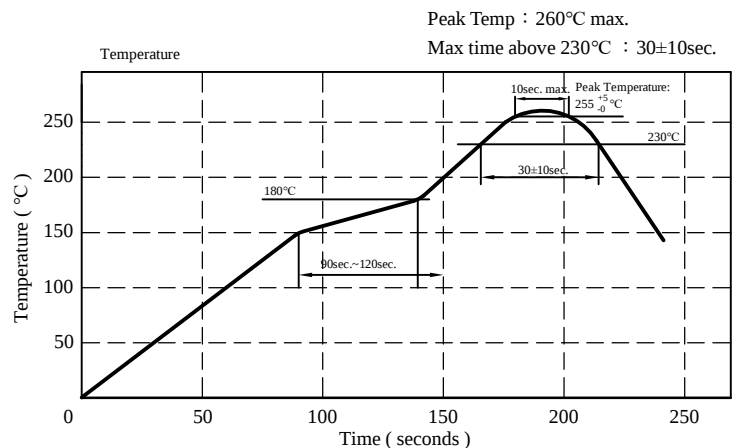

SPECIFICATION FOR APPROVAL

REF. :

PROD.	Shielded SMD Power Inductor	ABC'S DWG NO.	EHI2512□□□□S□-□□□		
NAME		REV.	20220906-F	PAGE	2

IV . Electrical characteristics :

DWG. No.	Inductance (μ H)	Test Freq. (Hz)	RDC (m Ω) max.	Isat (A) max.	Irms (A) max.
EHI2512R47MSB-□□□	0.47 $\pm$ 20%	1M/1V	39	3.80	3.70
EHI25121R0MSB-□□□	1.00 $\pm$ 20%	1M/1V	59	3.00	3.00
EHI25121R5MSB-□□□	1.50 $\pm$ 20%	1M/1V	72	2.60	2.40
EHI25122R2MSB-□□□	2.20 $\pm$ 20%	1M/1V	108	2.20	2.00
EHI25123R3MSB-□□□	3.30 $\pm$ 20%	1M/1V	144	1.80	1.50
EHI25124R7MSB-□□□	4.70 $\pm$ 20%	1M/1V	240	1.50	1.30

- 1). Electrical specifications at 25°C
- 2). Isat base on $\Delta L/L0A=30\%$ max.
- 3). Irms base on Temp. rise 40°C max.



SPECIFICATION FOR APPROVAL

REF. :



PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		EHI2512□□□□S□-□□□		
		REV.	20220906-F	PAGE	3	

V . Curve :



EHI2512R47MSB

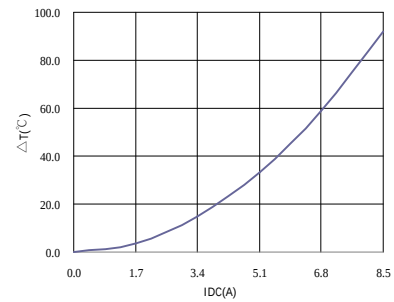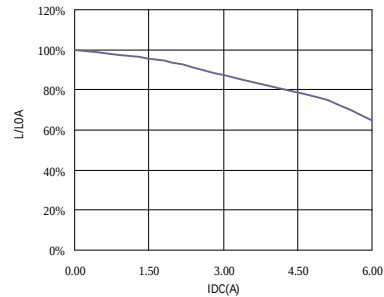



EHI25121R0MSB

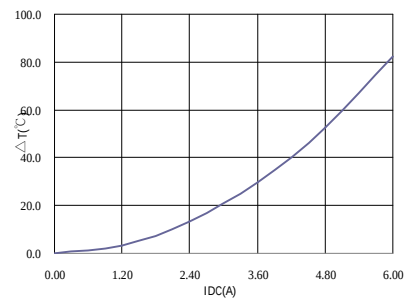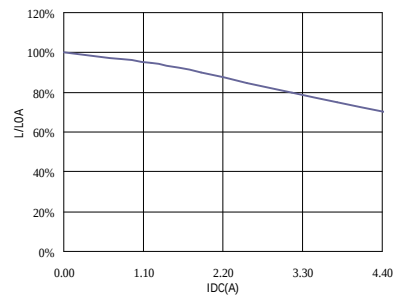

EHI25123R3MSB

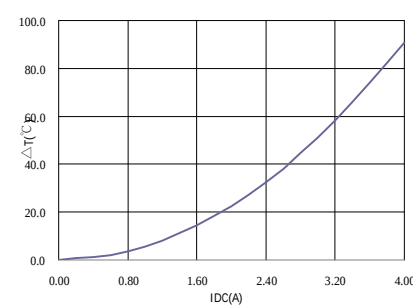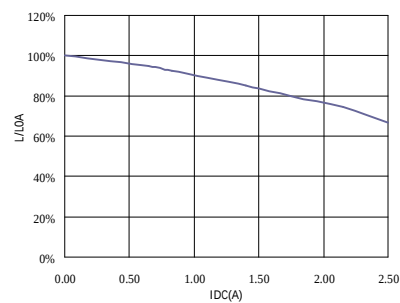

EHI25124R7MSB

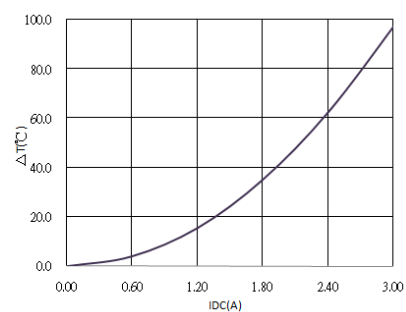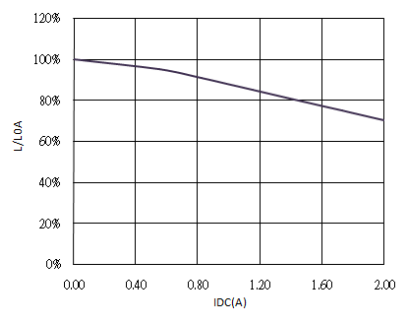

AR-001C



千如電子集團
ABC-ATEC ELECTRONICS GROUP



SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		EHI2512□□□□S□-□□□		
		REV.	20220906-F	PAGE	4	

VI . Packaging information :

(1) Configuration

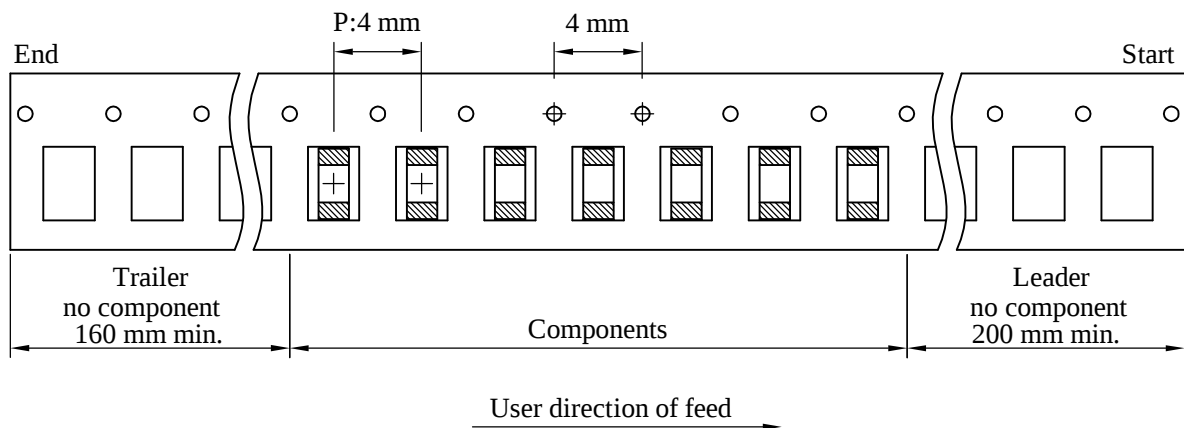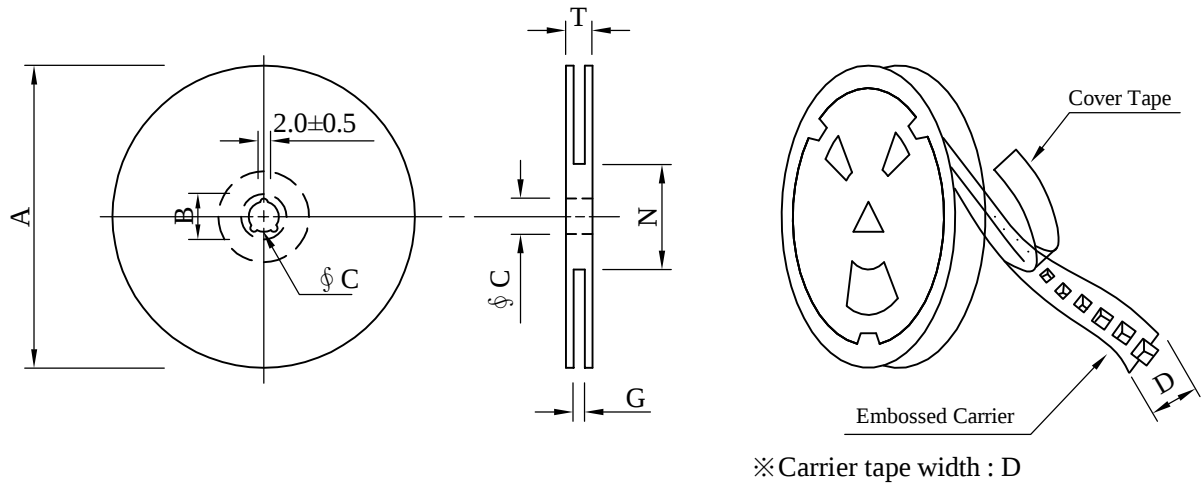

(2) Dimensions

Unit:mm

Style	A	B	C	D	G	N	T
07 - 08	180 ±2.0	21±0.8	13	8	8.4 ^{+2.0} ₋₀	60 ⁻⁰	14.4 ⁺⁰

(3) Q'TY & G.W. Per package


Code	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY(pcs)	G.W. (kg)	Size (cm)
B	3,000	155	07 - 08	150,000	7.0	41 x 39 x 22

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		EHI2512□□□□S□-□□□		
		REV.	20220906-F	PAGE	5	

VII . Drawing number expression :

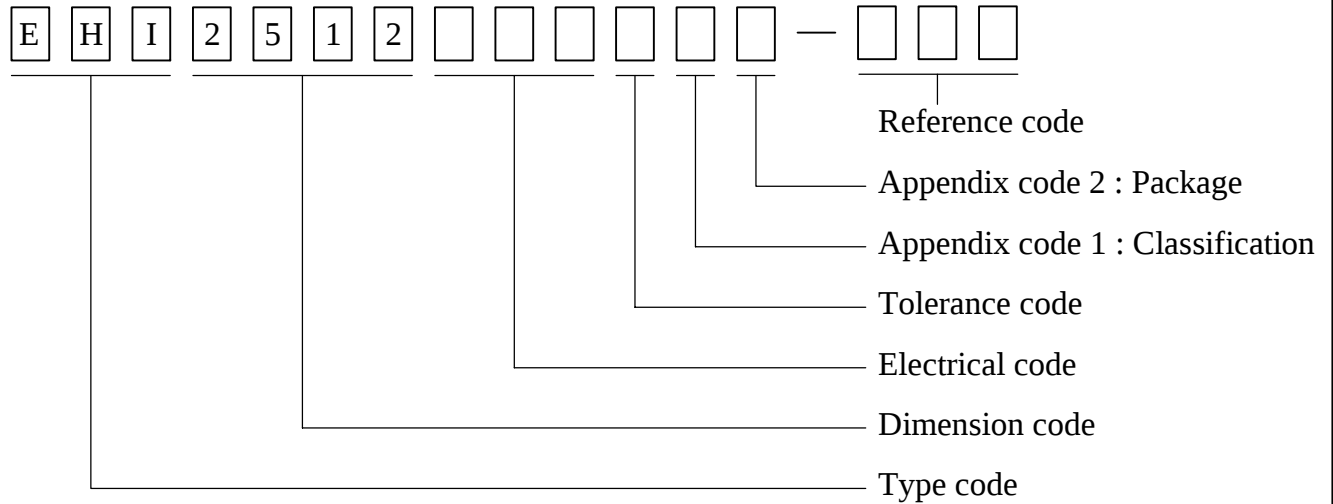

Appendix code 1 : Product Classification

Appendix code 2 : Package Information



Code	Inner package	Cover tape	Carrier tape	Bag	Package Q'TY	Remark
B	T /R (Reel package)	Heat seal	Antistatic	Antistatic	3,000 pcs	

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.	EHI2512□□□□S□-□□□		
		REV.	20220906-F	PAGE	6

VIII . Reliability test :

Item	Test Condition	Test Specification															
1.Adhesive Test	1.Test time:10±1sec. 2.Measure after removing pressure. 	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.															
2.Bending test	1.Bent depth : 2mm 2.PCB size : 40×100mm 3.PCB thickness : 1.0mm 4.Test time : 30sec. 	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.															
3.Vibration test	1.Frequency and Amplitued : 10-55-10 Hz, 1.5 mm 2.Direction:X, Y, Z 3.Test duration:2 hours for each direction, 6 hours in total.	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.															
4.Mechanical shock test	1.Peak acceleration : 1962m/s ² 2.Duration of pulse : 6ms 3.times in each of 3(X, Y, Z) axes.,	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.															
5.Drop test	The specimen must be fixed on PCB. It must be equipped with instruments of which weight is 500g. Then it shall be fallen freely from 100cm height to rigid wood 3 times in each of three axes.	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.															
6.Resistance to Solder Heat	1.Reflow soldering method Preheat : 150°C~180°C 90±30sec. Peak temp. : 255(+5/-0)°C (230°Cmin.,30±10sec.) 2.PCB thickness : 1.0mm 3.2 times	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.															
7.Solder ability	1. Electrode shall be immersed in flux at room temperature and then shall be immersed in solder bath after preheat. 2. Solder temp:245±5°C 、Dip time:3±0.5sec.	New solder shall cover 90% minimum of the surface immersed.															
8.Temperature drift	Temperature: -40°C ~ 125°C	Inductance temperature coefficient 1000ppm/°C or less.															
9. Low temperature test	1.Temp. : -40±3°C 2. Load : 500±12Hr	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.															
10. Dry heat test	1.Temp. : +85±2°C 2. Load : 500±12Hr	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.															
11. Humidity test	1.Temp. : +40±2°C 2. Humidity : 90~95%RH 3. Load : 500±12Hr	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.															
12. Thermal shock test	1. Condition of 1 cycle <table border="1" data-bbox="635 1671 987 1872"> <thead> <tr> <th>Step</th><th>Temp. (°C)</th><th>Duration (min.)</th></tr> </thead> <tbody> <tr> <td>1</td><td>-40±3</td><td>30±3</td></tr> <tr> <td>2</td><td>Room temp.</td><td>Within 3</td></tr> <tr> <td>3</td><td>+125±2</td><td>30±3</td></tr> <tr> <td>4</td><td>Room temp.</td><td>Within 3</td></tr> </tbody> </table> 2. Load : 100±12cycle	Step	Temp. (°C)	Duration (min.)	1	-40±3	30±3	2	Room temp.	Within 3	3	+125±2	30±3	4	Room temp.	Within 3	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.
Step	Temp. (°C)	Duration (min.)															
1	-40±3	30±3															
2	Room temp.	Within 3															
3	+125±2	30±3															
4	Room temp.	Within 3															

AR-001C



千如電子集團
ABC-ATEC ELECTRONICS GROUP

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.	EHI2512□□□□S□-□□□		
		REV.	20220906-F	PAGE	7

IX . Safety notes :

1. Products do not be used in related applications that directly affect the personal safety system or cause significant impacts and losses on society. If you apply to these applications, please be sure to contact us at first to confirm.
產品不可使用於直接影響人身安全系統或對社會會造成重大影響與損失之相關用途，若您應用於此，請務必優先與我們聯繫確認。
2. The storage period is less than 12 months. Ensure to follow the storage conditions (Temperature: 5 to 30 °C, Humidity: 10 to 60% RH or less). If the storage time is exceeded the limit, the electrodes might be deteriorate of terminal soldering.
儲存期不超過12個月，務必遵守儲存條件（溫度：5至30℃，濕度：10至60%RH以下）。如果超過了儲存時間，端子電極可能會氧化而影響焊接。
3. Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
不要在有氣體腐蝕等條件的地方使用或存放（鹽，酸，鹼等）。
4. Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
安裝時的焊接條件應在規格範圍內。如果超過要求，可能會發生短路，性能下降或壽命縮短。
5. When using, it should try to avoid excessive mechanical impact on the product, such as collision / drop ... and other reasons.
使用時，應盡量避免產品受到過度機械衝擊，如碰撞/掉落...等原因。
6. When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
將已安裝新片的電路板組裝到裝置時，請注意應盡量避免電路板受到組裝變形...等，導致產品受到應力。
7. Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
產品會因通電而自我發熱(溫度上升)，因此在熱影響設計方面，需保留適當公差。
8. Do not expose the products to magnets or magnetic fields.
請勿將產品暴露於磁鐵或是磁場中。
9. If you would like to use this products to performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property, or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.
如果您希望將此產品用於性能和/或質量要求更嚴格的安全性或可靠性，或其失敗、故障或麻煩可能對社會、個人或財產造成嚴重損害，或者您有特殊情況要求超出目錄中規定的範圍或條件，請與我們聯繫。